


圆弧组件

实现了直轨与弯轨的对接

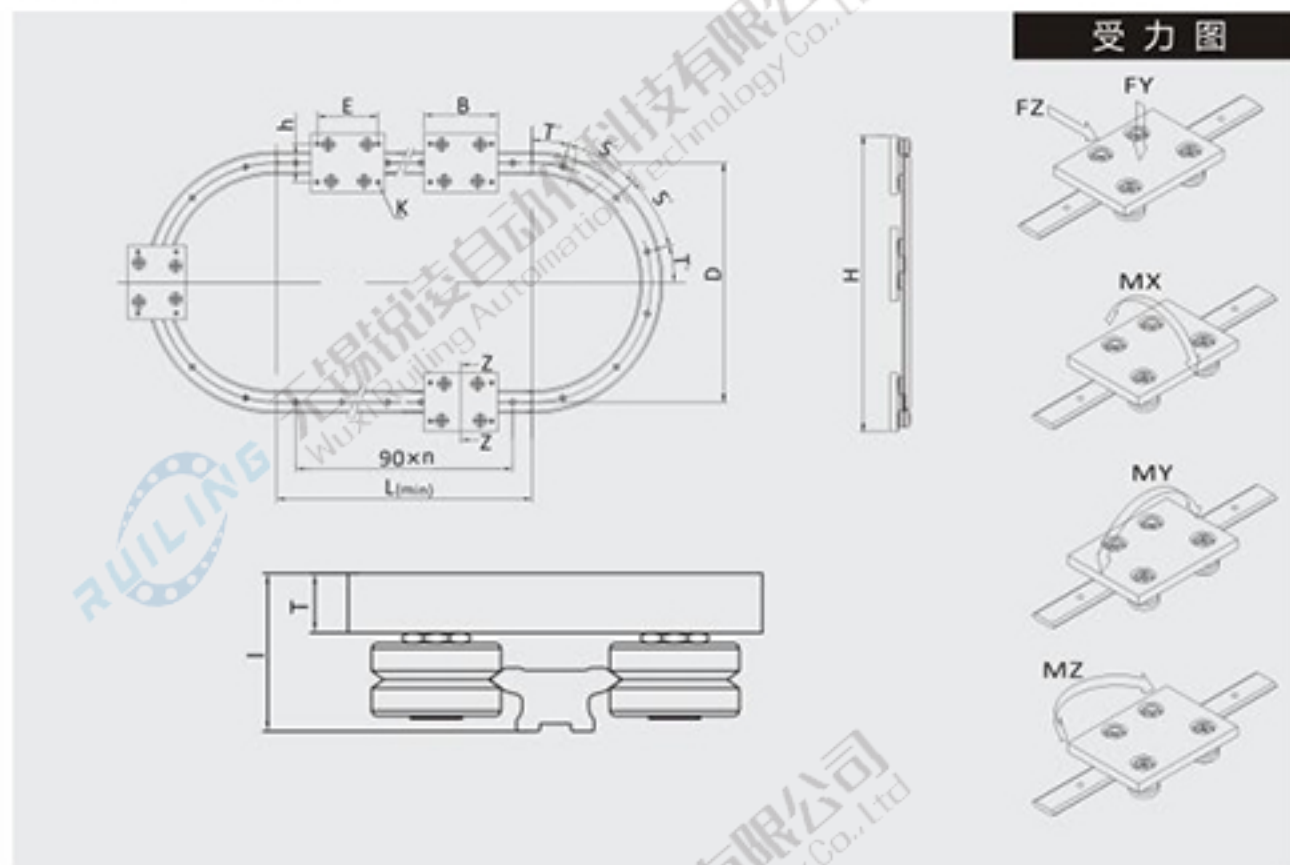

部品号	适用				主要尺寸 (mm)		
	直导轨	圆弧导轨	滑块	轴承	L (mm)	D	H
RM25TxL-159BP	RM25TxL	RM25-159B	RMP25-159	RMJ25C	180	159	239
RM25TxL-255BP		RM25-255B	RMP25-255	RMJ25DE		255	335
RM25TxL-351BP		RM25-351B	RMP25-351			351	431
RM44TxL-468BP	RM44TxL	RM44-468B	RMP44-468	RMJ34C	220	468	584
RM44TxL-612BP		RM44-612B	RMP44-612	RMJ34DE		612	728
RM76TxL-799BP	RM44TxL	RM76-799B	RMP76-799	RMJ54C	220	799	984
RM76TxL-1033BP		RM76-1033B	RMP76-1033	RMJ54DE		1033	1218

- 注：1、导轨总长度以毫米为单位代替“L”；
2、如需方形的导轨请联系技术部；
四方形式的圆导轨为45°，即1/4圆；

订购示例



• 载荷受力表

部品号	性能 (已润滑)					质量(kg)
	容许载荷(N)		扭矩载荷(Nm)			
	FY	FZ	MX	MY	MZ	
RMP25-159	1280	1200	14	27	25	0.4
RMP25-222				25	23	
RMP25-351				27	24	
RMP44-159	3200	2800	64	110	95	1.0
RMP44-612				115	100	1.1
RMP76-799	7200	6400	250	340	300	3.4
RMP76-1033				410	360	3.6

单位：mm

主要尺寸 (mm)								
E	h	S	T	A	B	T	I	K
80	50	45	22.5	80	95	11.5	30.5	4xM6
					100			
85	75	50	15	116	105	14.5	38.5	4xM8
120					145			
125					150			
160	100	22.5	11.25	185	190	20	58.5	4xM10
180					210			